

Report No.:

Test Time: 2025-09-16 16:06

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: 80D

Luminous Width (mm): -14

Current: 0.092 A

Power Factor: 0.514

Luminous Length (mm): -190

Voltage: 229.5 V

Power: 10.90 W

Photometric Results

CIE Class: Direct

Measurement Flux: 782.1 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(50%): H68.6

Vertical Diffuse Angle(50%): V68.6

Luminaire Efficacy Rating (LER): 71.80

Max. Intensity: 684.97 cd

S/MH(C0/C180): 1.16

Total Rated Lamp Lumens: 782.1 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 656.45 cd


Pos of Max. Intensity: H0 V19

S/MH(C90/C270): 1.16

Picture Of Luminaire



Luminous Intensity Distribution Curve

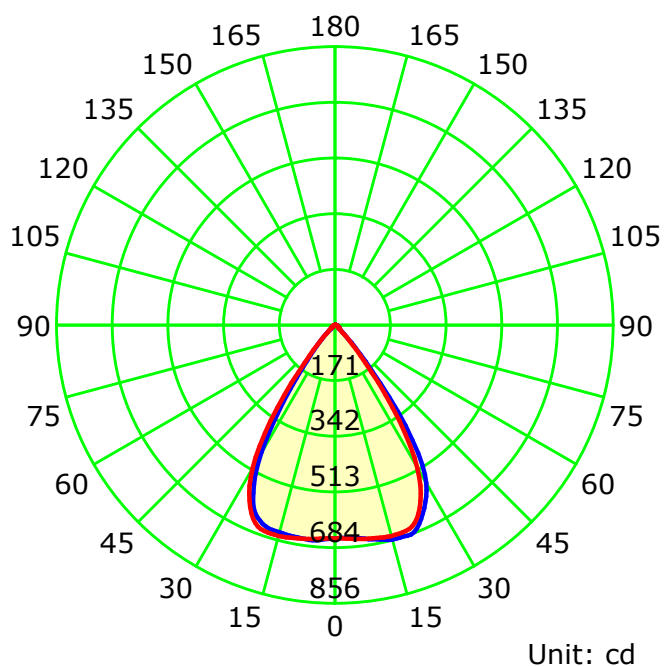

— C0-C180 — C90-C270

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

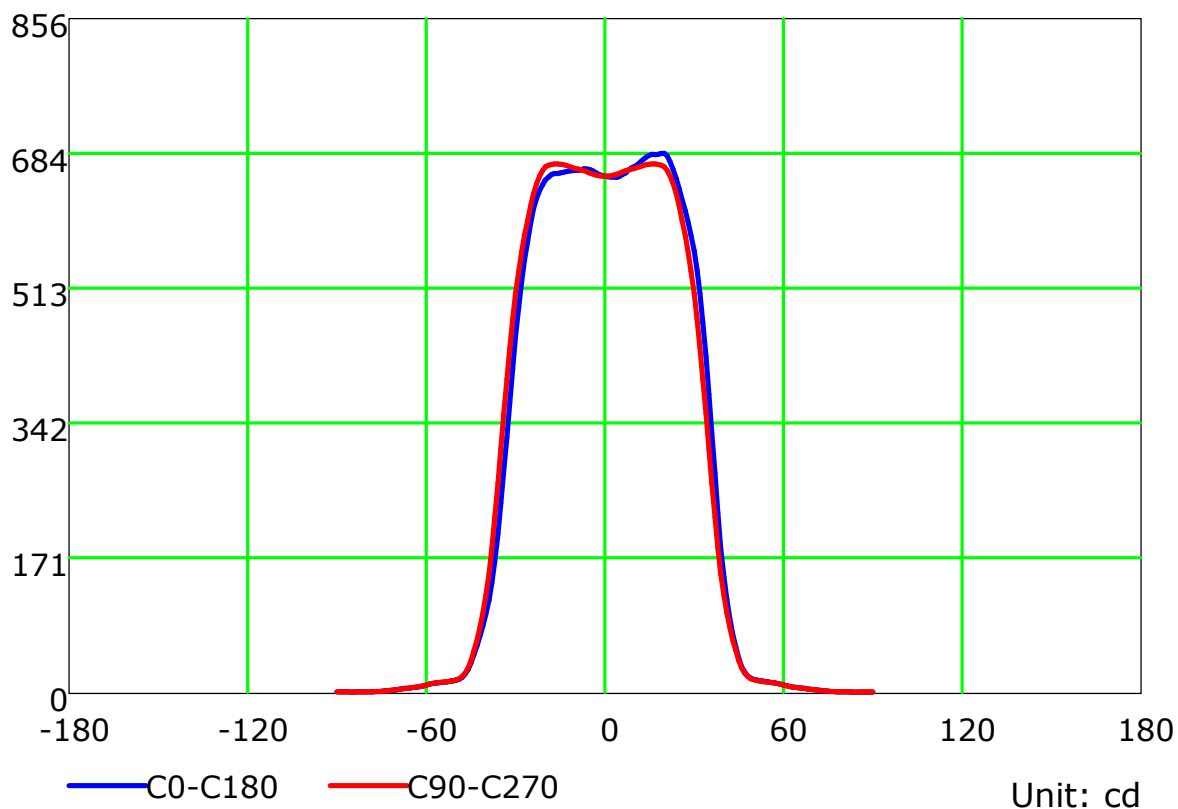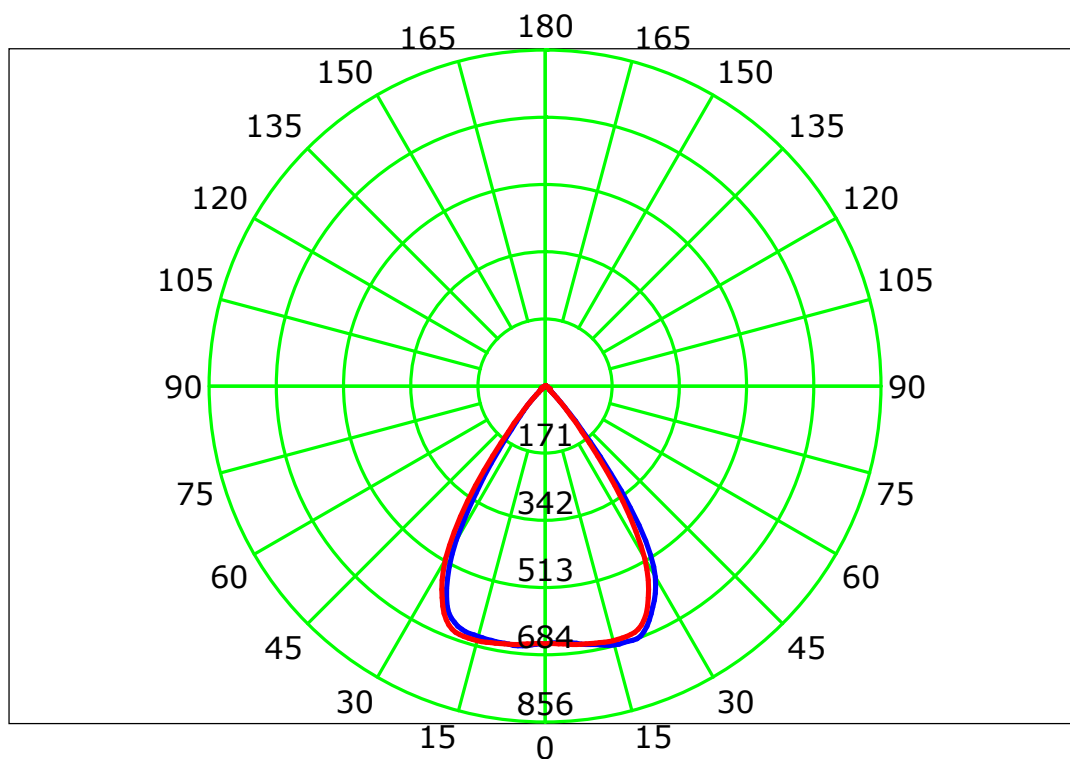

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd/klm)

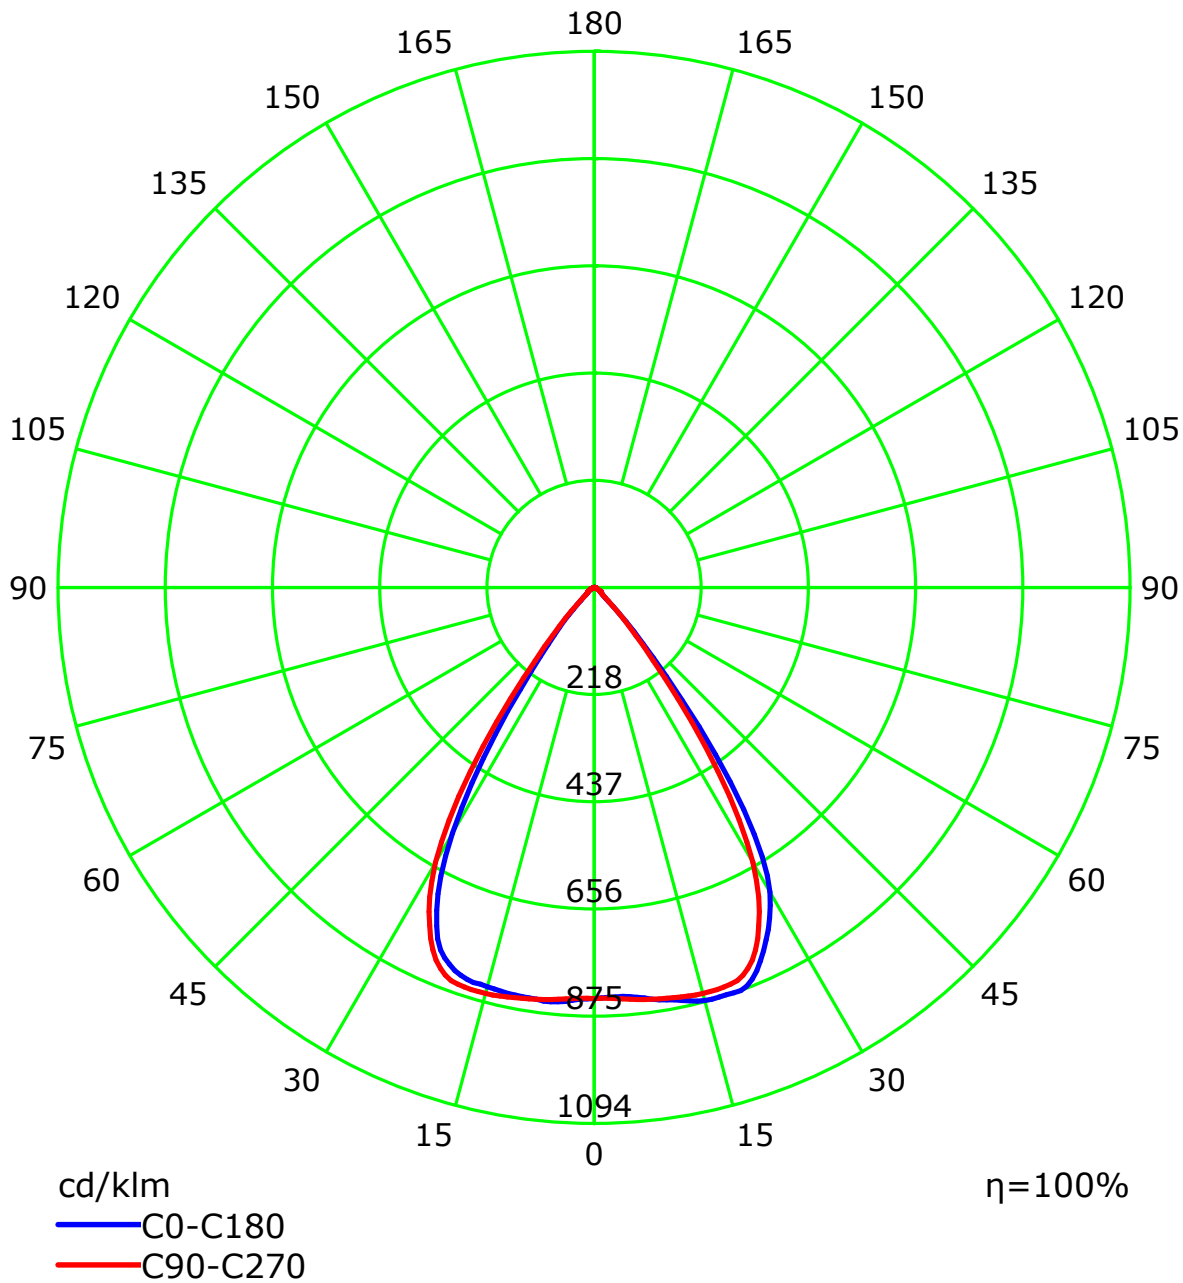

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Isocandela (rectangle)

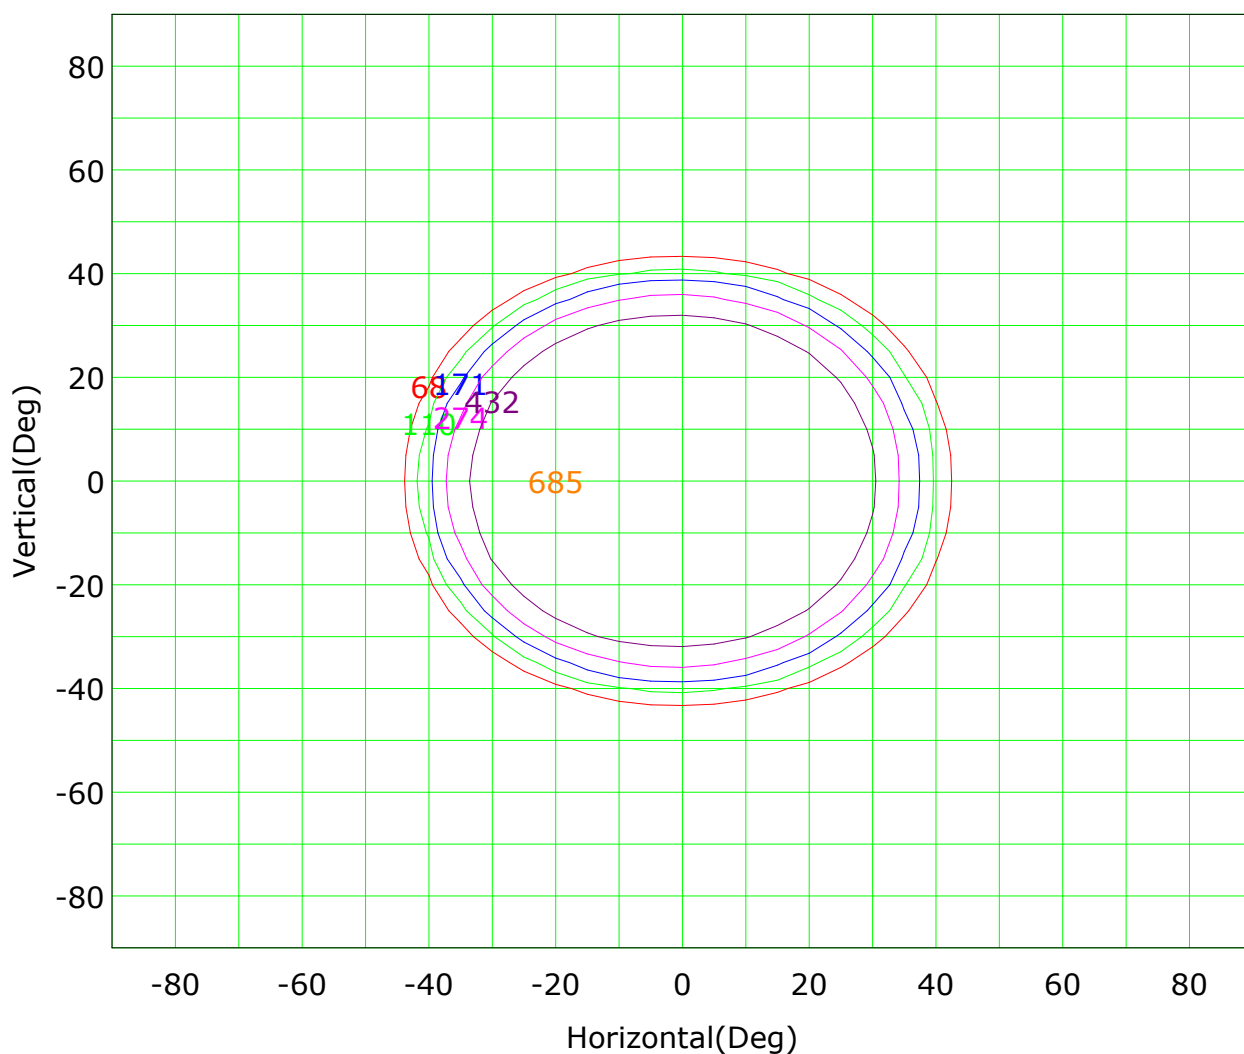

Imax (100%): 685 cd

| | | | |
|---------|--------|---------|--------|
| (10%): | 68 cd | (16%): | 110 cd |
| (25%): | 171 cd | (40%): | 274 cd |
| (63%): | 432 cd | (100%): | 685 cd |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:

IsoLux Plot

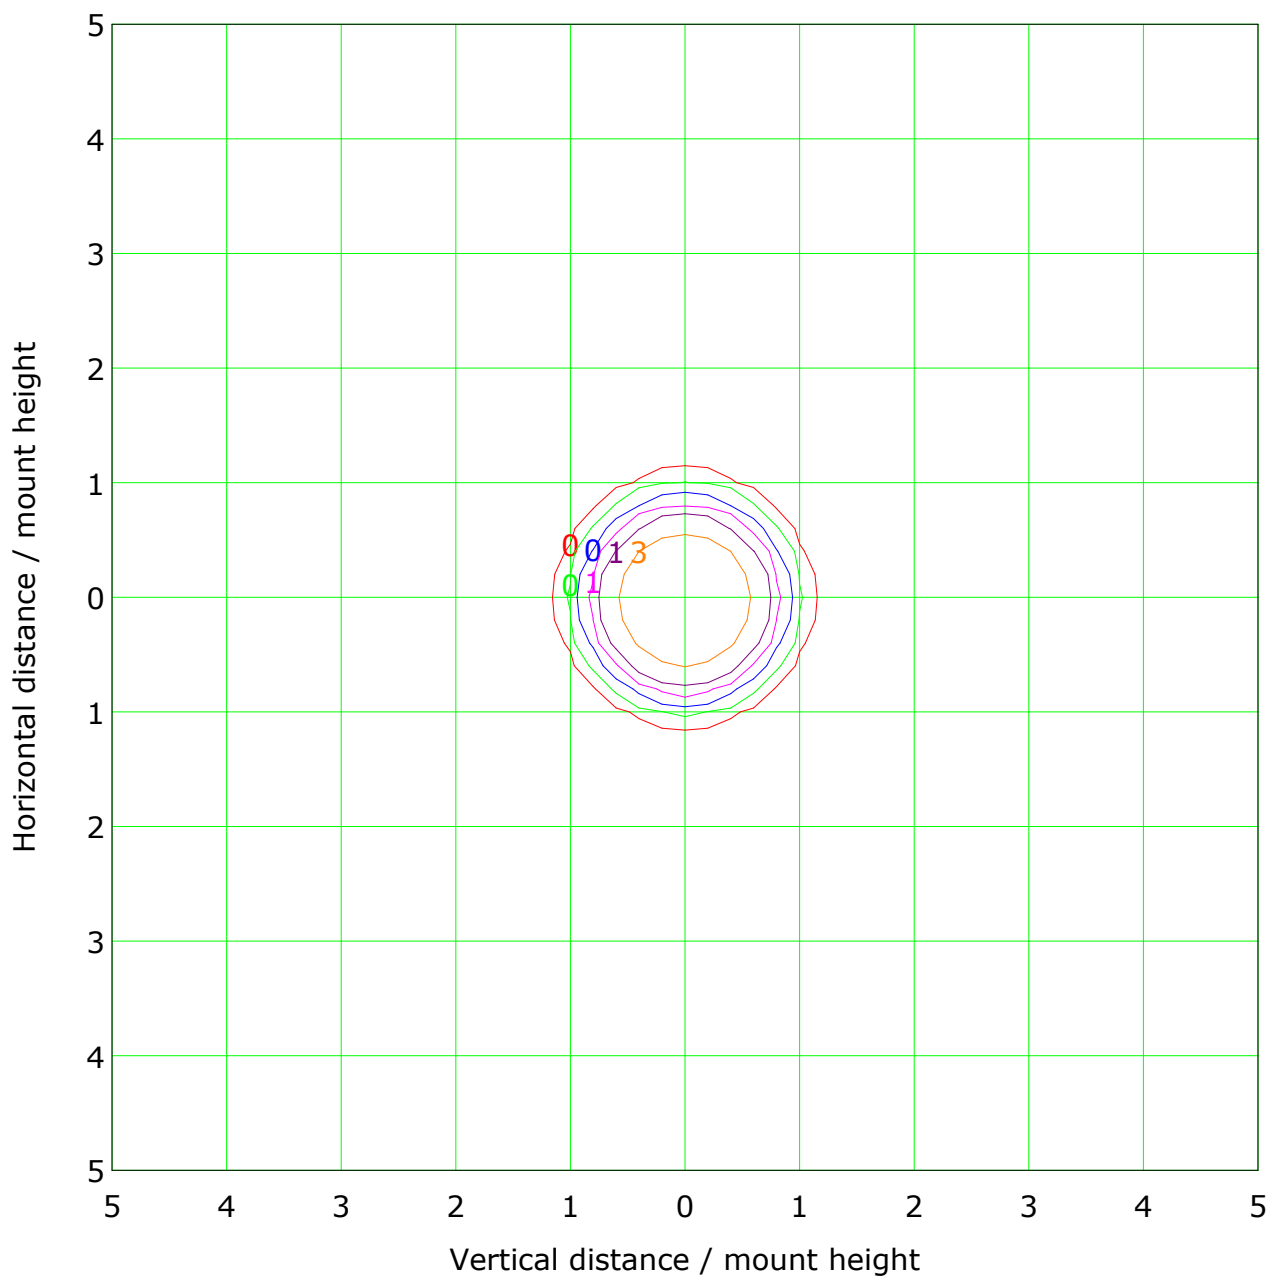

Mounting Height: 10.0m Max Lux(100%): 6.6 lx

| | |
|------------------|------------------|
| — (1%): 0.1 lx | — (2%): 0.1 lx |
| — (5%): 0.3 lx | — (10%): 0.7 lx |
| — (20%): 1.3 lx | — (50%): 3.3 lx |
| — (100%): 6.6 lx | |

C Plane (°):0.0-180.0: 180.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: CHL-6E

Distance: 2.905 m

Humidity:

Inspector:


Illuminance at a Distance

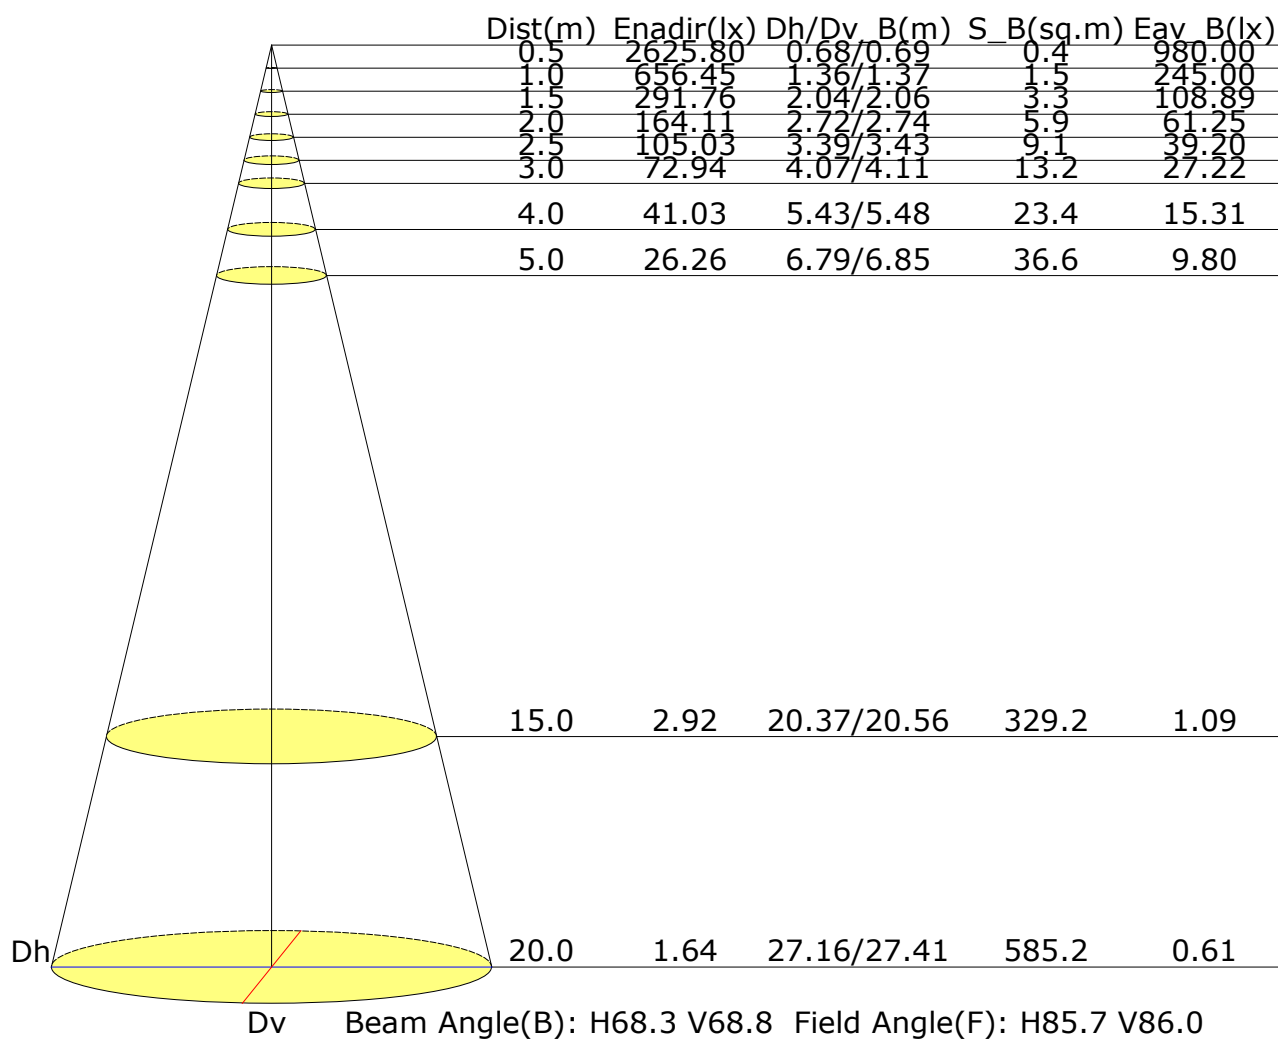

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Vertical IsoLux Plot

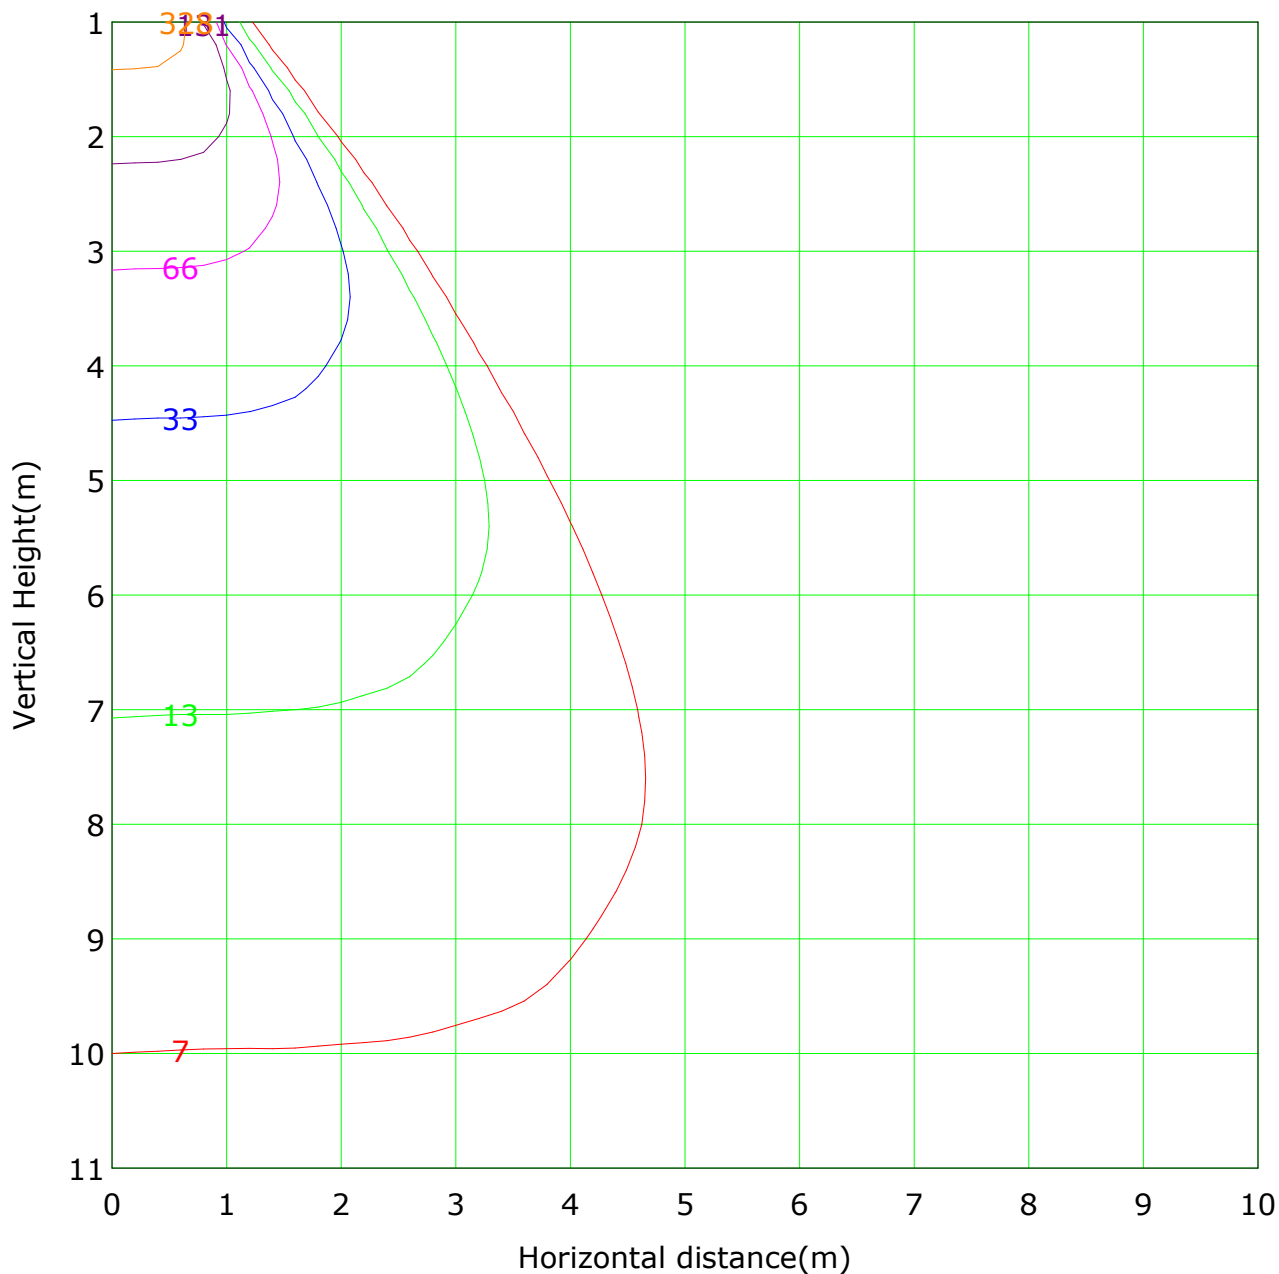

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 656.5 lx

| | |
|------------------|------------------|
| (1%): 6.6 lx | (2%): 13.1 lx |
| (5%): 32.8 lx | (10%): 65.6 lx |
| (20%): 131.3 lx | (50%): 328.2 lx |
| (100%): 656.5 lx | |


C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

Flux Out: 637.03lm

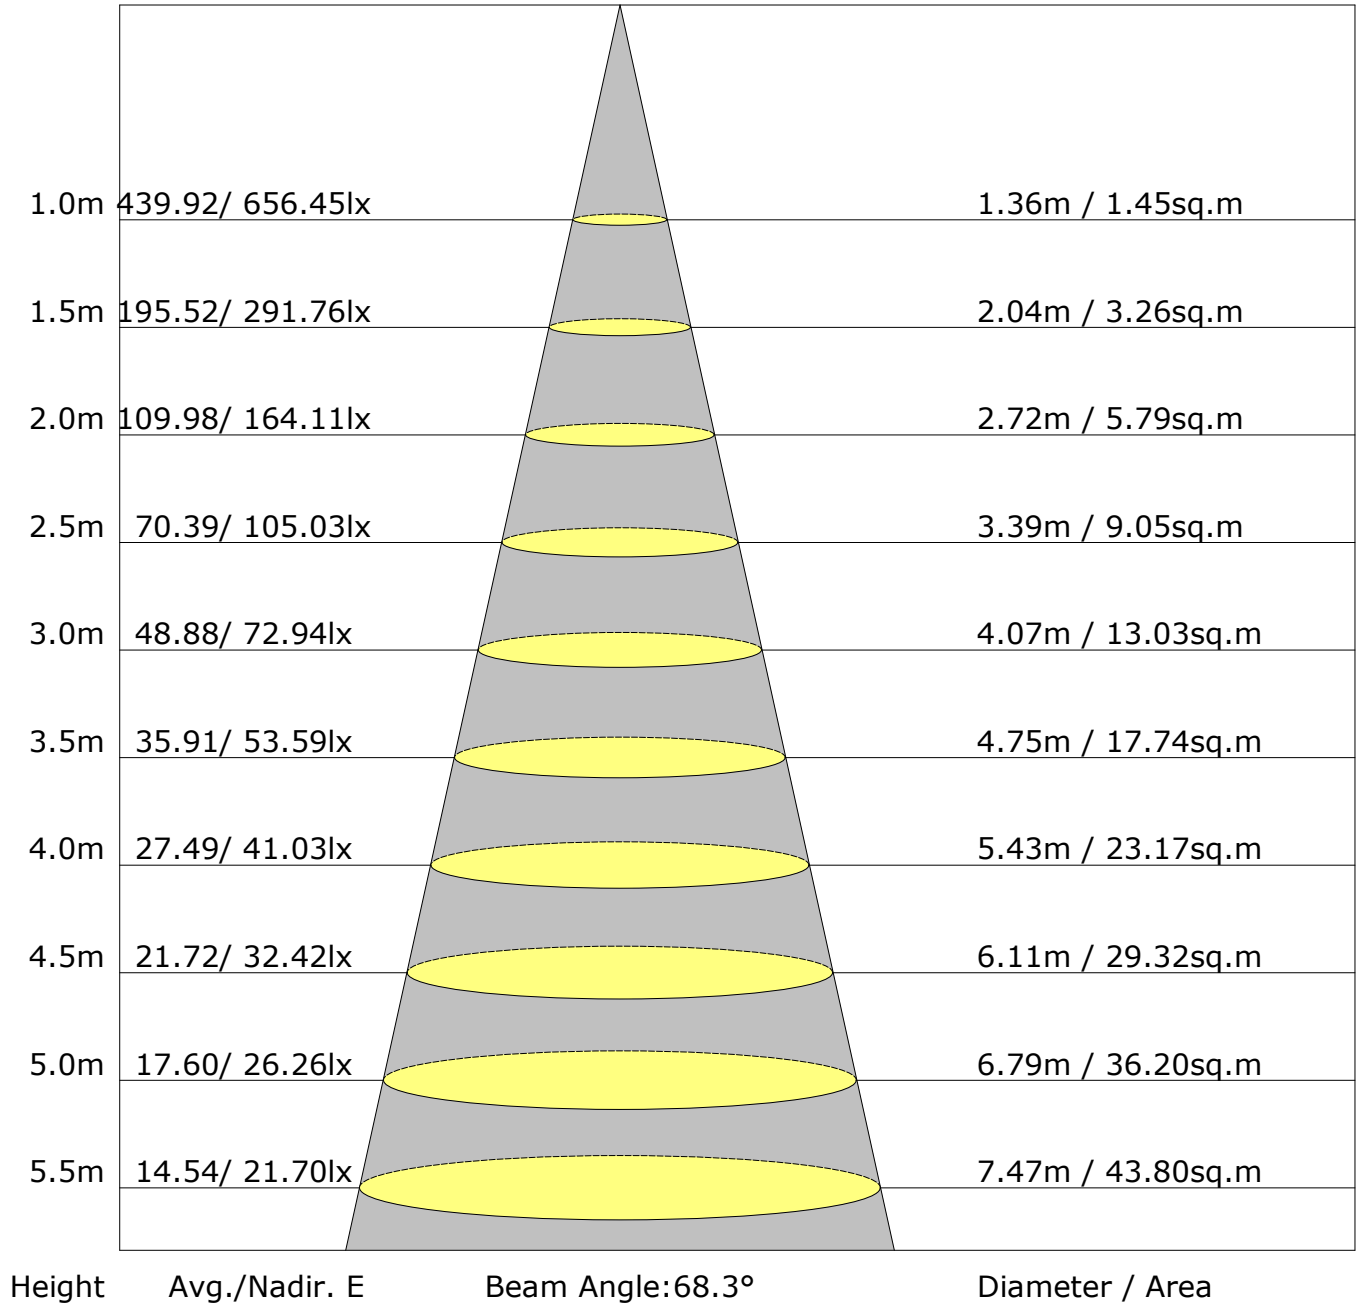

C Plane (°): 0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

UGR Table


| | | | | | | | | | | |
|--|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflectance: | | | | | | | | | | |
| Ceiling (cavity) | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| Wall | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| Reference plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Room dimensions | Viewed crosswise | | | | | Viewed endwise | | | | |
| X=2H Y=2H | 22.8 | 23.7 | 23.0 | 23.9 | 24.1 | 22.1 | 23.0 | 22.4 | 23.2 | 23.4 |
| 3H | 22.7 | 23.5 | 23.0 | 23.7 | 24.0 | 22.0 | 22.9 | 22.3 | 23.1 | 23.3 |
| 4H | 22.6 | 23.4 | 22.9 | 23.6 | 23.9 | 22.0 | 22.7 | 22.3 | 23.0 | 23.3 |
| 6H | 22.5 | 23.2 | 22.9 | 23.5 | 23.8 | 21.9 | 22.6 | 22.2 | 22.9 | 23.2 |
| 8H | 22.5 | 23.2 | 22.9 | 23.5 | 23.8 | 21.9 | 22.6 | 22.2 | 22.9 | 23.2 |
| 12H | 22.5 | 23.1 | 22.8 | 23.4 | 23.8 | 21.8 | 22.5 | 22.2 | 22.8 | 23.1 |
| X=4H Y=2H | 22.6 | 23.4 | 22.9 | 23.6 | 23.9 | 21.9 | 22.7 | 22.3 | 23.0 | 23.2 |
| 3H | 22.5 | 23.1 | 22.9 | 23.5 | 23.8 | 21.9 | 22.5 | 22.2 | 22.8 | 23.2 |
| 4H | 22.4 | 23.0 | 22.8 | 23.4 | 23.7 | 21.8 | 22.4 | 22.2 | 22.7 | 23.1 |
| 6H | 22.4 | 22.9 | 22.8 | 23.2 | 23.6 | 21.7 | 22.3 | 22.2 | 22.6 | 23.0 |
| 8H | 22.3 | 22.8 | 22.8 | 23.2 | 23.6 | 21.7 | 22.2 | 22.1 | 22.6 | 23.0 |
| 12H | 22.3 | 22.7 | 22.7 | 23.1 | 23.6 | 21.7 | 22.1 | 22.1 | 22.5 | 22.9 |
| X=8H Y=4H | 22.3 | 22.8 | 22.8 | 23.2 | 23.6 | 21.7 | 22.2 | 22.1 | 22.6 | 23.0 |
| 6H | 22.3 | 22.6 | 22.7 | 23.1 | 23.5 | 21.6 | 22.0 | 22.1 | 22.4 | 22.9 |
| 8H | 22.2 | 22.6 | 22.7 | 23.0 | 23.5 | 21.6 | 21.9 | 22.1 | 22.4 | 22.9 |
| 12H | 22.2 | 22.5 | 22.7 | 22.9 | 23.4 | 21.6 | 21.9 | 22.1 | 22.3 | 22.8 |
| X=12H Y=4H | 22.3 | 22.7 | 22.7 | 23.1 | 23.5 | 21.7 | 22.1 | 22.1 | 22.5 | 22.9 |
| 6H | 22.2 | 22.5 | 22.7 | 23.0 | 23.5 | 21.6 | 21.9 | 22.1 | 22.4 | 22.8 |
| 8H | 22.2 | 22.5 | 22.7 | 22.9 | 23.4 | 21.6 | 21.9 | 22.1 | 22.3 | 22.8 |
| Variations with the observer position at spacings: | | | | | | | | | | |
| S=1.0H | +5.2/-8.5 | | | | | +5.0/-7.9 | | | | |
| S=1.5H | +8.0/-9.5 | | | | | +7.8/-9.0 | | | | |
| S=2.0H | +10.0/-10.6 | | | | | +9.8/-9.9 | | | | |

Calculate in accordance with CIE Pub.117. The table is revised with 782lm ($8\log(F/F_0) = -0.9$).

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

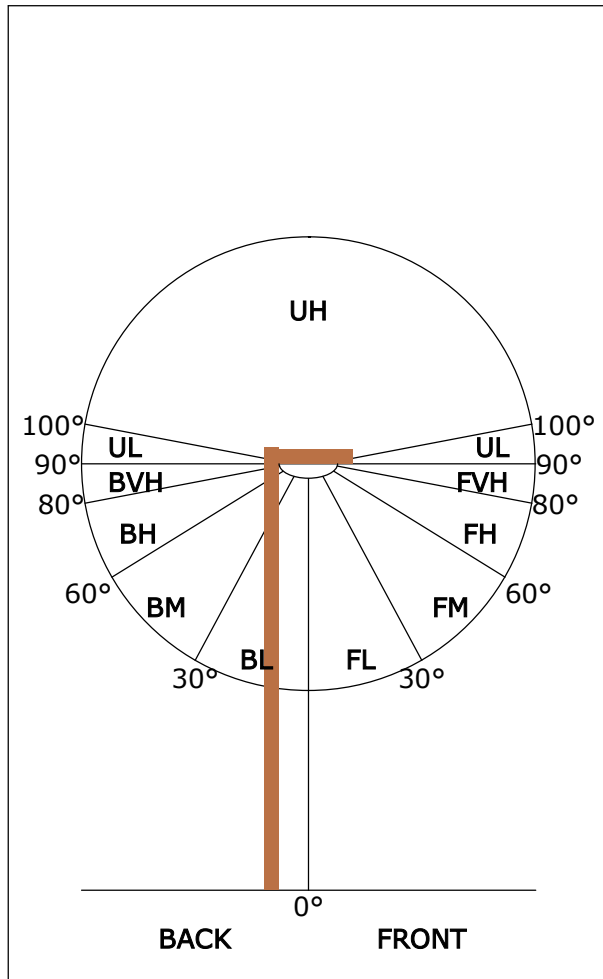

| ZONE | LUMENS | % LAMP LUMENS |
|----------------|--------|---------------|
| FORWARD LIGHT | 405 | 51.8 |
| FL (0°-30°) | 270 | 34.6 |
| FM (30°-60°) | 130 | 16.7 |
| FH (60°-80°) | 4 | 0.5 |
| FVH (80°-90°) | 0 | 0.1 |
| BACK LIGHT | 377 | 48.2 |
| BL (0°-30°) | 262 | 33.5 |
| BM (30°-60°) | 110 | 14.1 |
| BH (60°-80°) | 4 | 0.5 |
| BVH (80°-90°) | 0 | 0.1 |
| UP LIGHT | 0 | 0.0 |
| UL (90°-100°) | 0 | 0.0 |
| UH (100°-180°) | 0 | 0.0 |
| TRAPPED LIGHT | NA | NA |

| BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07 | |
|--|----------|
| Asymmetrical Luminaire Types (Type I,II,III,IV) | B1 U0 G0 |
| Quadrilateral Symmetrical Luminaire Types (Type V,Area Light) | B1 U0 G0 |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen

| Gamma [°] | I _{mean} [cd] | Zonal Flux [lm] | Sum Zonal Flux [lm] | Rel Zonal Flux [%] | Sum Rel Zonal Flux [%] |
|--------------|---------------------------|--------------------|------------------------|-----------------------|---------------------------|
| 0.0-1.0 | 656.4 | 0.6 | 0.6 | 0.08 | 0.08 |
| 1.0-2.0 | 656.5 | 1.9 | 2.5 | 0.24 | 0.32 |
| 2.0-3.0 | 657.1 | 3.1 | 5.7 | 0.40 | 0.72 |
| 3.0-4.0 | 658.2 | 4.4 | 10.1 | 0.56 | 1.29 |
| 4.0-5.0 | 659.4 | 5.7 | 15.7 | 0.73 | 2.01 |
| 5.0-6.0 | 660.9 | 6.9 | 22.7 | 0.89 | 2.90 |
| 6.0-7.0 | 662.4 | 8.2 | 30.9 | 1.05 | 3.95 |
| 7.0-8.0 | 663.6 | 9.5 | 40.4 | 1.21 | 5.17 |
| 8.0-9.0 | 664.7 | 10.8 | 51.2 | 1.38 | 6.54 |
| 9.0-10.0 | 665.6 | 12.0 | 63.2 | 1.54 | 8.08 |
| 10.0-11.0 | 666.6 | 13.3 | 76.5 | 1.70 | 9.79 |
| 11.0-12.0 | 667.8 | 14.6 | 91.1 | 1.87 | 11.65 |
| 12.0-13.0 | 669.1 | 15.9 | 107.0 | 2.03 | 13.68 |
| 13.0-14.0 | 670.4 | 17.2 | 124.2 | 2.19 | 15.88 |
| 14.0-15.0 | 671.2 | 18.4 | 142.6 | 2.36 | 18.24 |
| 15.0-16.0 | 671.5 | 19.7 | 162.3 | 2.52 | 20.75 |
| 16.0-17.0 | 671.7 | 20.9 | 183.2 | 2.67 | 23.43 |
| 17.0-18.0 | 671.4 | 22.1 | 205.4 | 2.83 | 26.26 |
| 18.0-19.0 | 670.5 | 23.3 | 228.7 | 2.98 | 29.24 |
| 19.0-20.0 | 669.0 | 24.5 | 253.2 | 3.13 | 32.37 |
| 20.0-21.0 | 665.7 | 25.6 | 278.7 | 3.27 | 35.64 |
| 21.0-22.0 | 659.8 | 26.5 | 305.3 | 3.39 | 39.03 |
| 22.0-23.0 | 651.5 | 27.3 | 332.6 | 3.50 | 42.53 |
| 23.0-24.0 | 640.4 | 28.0 | 360.6 | 3.58 | 46.11 |
| 24.0-25.0 | 626.1 | 28.5 | 389.1 | 3.64 | 49.75 |
| 25.0-26.0 | 609.3 | 28.8 | 417.8 | 3.68 | 53.43 |
| 26.0-27.0 | 590.8 | 28.9 | 446.8 | 3.70 | 57.12 |
| 27.0-28.0 | 570.6 | 28.9 | 475.6 | 3.69 | 60.82 |
| 28.0-29.0 | 547.8 | 28.7 | 504.3 | 3.66 | 64.48 |
| 29.0-30.0 | 521.5 | 28.2 | 532.5 | 3.60 | 68.08 |
| 30.0-31.0 | 490.8 | 27.3 | 559.8 | 3.49 | 71.58 |
| 31.0-32.0 | 456.1 | 26.1 | 585.9 | 3.34 | 74.92 |
| 32.0-33.0 | 417.7 | 24.6 | 610.5 | 3.15 | 78.07 |
| 33.0-34.0 | 376.1 | 22.8 | 633.3 | 2.91 | 80.98 |
| 34.0-35.0 | 332.3 | 20.6 | 653.9 | 2.64 | 83.61 |
| 35.0-36.0 | 287.9 | 18.3 | 672.3 | 2.34 | 85.96 |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

| Gamma [°] | I _{mean} [cd] | Zonal Flux [lm] | Sum Zonal Flux [lm] | Rel Zonal Flux [%] | Sum Rel Zonal Flux [%] |
|--------------|---------------------------|--------------------|------------------------|-----------------------|---------------------------|
| 36.0-37.0 | 244.4 | 15.9 | 688.2 | 2.04 | 88.00 |
| 37.0-38.0 | 203.4 | 13.6 | 701.8 | 1.74 | 89.73 |
| 38.0-39.0 | 167.0 | 11.4 | 713.2 | 1.46 | 91.19 |
| 39.0-40.0 | 136.7 | 9.5 | 722.7 | 1.22 | 92.41 |
| 40.0-41.0 | 112.5 | 8.0 | 730.7 | 1.02 | 93.43 |
| 41.0-42.0 | 92.6 | 6.7 | 737.5 | 0.86 | 94.30 |
| 42.0-43.0 | 75.5 | 5.6 | 743.1 | 0.72 | 95.01 |
| 43.0-44.0 | 60.4 | 4.6 | 747.6 | 0.58 | 95.59 |
| 44.0-45.0 | 47.2 | 3.6 | 751.2 | 0.46 | 96.06 |
| 45.0-46.0 | 36.2 | 2.8 | 754.1 | 0.36 | 96.42 |
| 46.0-47.0 | 27.9 | 2.2 | 756.3 | 0.28 | 96.70 |
| 47.0-48.0 | 22.4 | 1.8 | 758.1 | 0.23 | 96.93 |
| 48.0-49.0 | 19.1 | 1.6 | 759.7 | 0.20 | 97.13 |
| 49.0-50.0 | 17.0 | 1.4 | 761.1 | 0.18 | 97.32 |
| 50.0-51.0 | 15.8 | 1.3 | 762.4 | 0.17 | 97.49 |
| 51.0-52.0 | 15.0 | 1.3 | 763.7 | 0.16 | 97.65 |
| 52.0-53.0 | 14.4 | 1.2 | 765.0 | 0.16 | 97.81 |
| 53.0-54.0 | 13.8 | 1.2 | 766.2 | 0.16 | 97.97 |
| 54.0-55.0 | 13.4 | 1.2 | 767.4 | 0.15 | 98.12 |
| 55.0-56.0 | 12.9 | 1.2 | 768.5 | 0.15 | 98.27 |
| 56.0-57.0 | 12.4 | 1.1 | 769.7 | 0.15 | 98.41 |
| 57.0-58.0 | 12.0 | 1.1 | 770.8 | 0.14 | 98.56 |
| 58.0-59.0 | 11.3 | 1.1 | 771.8 | 0.13 | 98.69 |
| 59.0-60.0 | 10.2 | 1.0 | 772.8 | 0.12 | 98.81 |
| 60.0-61.0 | 9.1 | 0.9 | 773.7 | 0.11 | 98.92 |
| 61.0-62.0 | 8.3 | 0.8 | 774.5 | 0.10 | 99.03 |
| 62.0-63.0 | 7.6 | 0.7 | 775.2 | 0.09 | 99.12 |
| 63.0-64.0 | 7.0 | 0.7 | 775.9 | 0.09 | 99.21 |
| 64.0-65.0 | 6.4 | 0.6 | 776.5 | 0.08 | 99.29 |
| 65.0-66.0 | 5.9 | 0.6 | 777.1 | 0.08 | 99.36 |
| 66.0-67.0 | 5.5 | 0.6 | 777.7 | 0.07 | 99.43 |
| 67.0-68.0 | 5.1 | 0.5 | 778.2 | 0.07 | 99.50 |
| 68.0-69.0 | 4.5 | 0.5 | 778.6 | 0.06 | 99.56 |
| 69.0-70.0 | 4.0 | 0.4 | 779.1 | 0.05 | 99.61 |
| 70.0-71.0 | 3.5 | 0.4 | 779.4 | 0.05 | 99.66 |
| 71.0-72.0 | 3.1 | 0.3 | 779.7 | 0.04 | 99.70 |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

| G\C | C0.0 | C180.0 | | | | | | | | |
|-------|-------|--------|--|--|--|--|--|--|--|--|
| G0.0 | 656.5 | 656.5 | | | | | | | | |
| G1.0 | 655.6 | 657.1 | | | | | | | | |
| G2.0 | 655.0 | 658.3 | | | | | | | | |
| G3.0 | 654.9 | 660.2 | | | | | | | | |
| G4.0 | 654.8 | 662.7 | | | | | | | | |
| G5.0 | 655.9 | 664.3 | | | | | | | | |
| G6.0 | 658.3 | 665.3 | | | | | | | | |
| G7.0 | 660.5 | 665.7 | | | | | | | | |
| G8.0 | 663.9 | 664.3 | | | | | | | | |
| G9.0 | 666.8 | 663.7 | | | | | | | | |
| G10.0 | 668.6 | 663.4 | | | | | | | | |
| G11.0 | 671.0 | 663.2 | | | | | | | | |
| G12.0 | 674.2 | 662.7 | | | | | | | | |
| G13.0 | 677.6 | 662.0 | | | | | | | | |
| G14.0 | 680.8 | 661.1 | | | | | | | | |
| G15.0 | 682.7 | 660.2 | | | | | | | | |
| G16.0 | 683.9 | 659.4 | | | | | | | | |
| G17.0 | 683.7 | 659.7 | | | | | | | | |
| G18.0 | 684.0 | 658.3 | | | | | | | | |
| G19.0 | 685.0 | 654.9 | | | | | | | | |
| G20.0 | 685.0 | 651.3 | | | | | | | | |
| G21.0 | 681.8 | 645.0 | | | | | | | | |
| G22.0 | 674.3 | 638.1 | | | | | | | | |
| G23.0 | 664.8 | 628.8 | | | | | | | | |
| G24.0 | 653.1 | 614.8 | | | | | | | | |
| G25.0 | 640.4 | 596.2 | | | | | | | | |
| G26.0 | 626.7 | 574.1 | | | | | | | | |
| G27.0 | 613.0 | 549.6 | | | | | | | | |
| G28.0 | 597.7 | 522.2 | | | | | | | | |
| G29.0 | 580.9 | 490.2 | | | | | | | | |
| G30.0 | 561.3 | 453.4 | | | | | | | | |
| G31.0 | 537.3 | 411.3 | | | | | | | | |
| G32.0 | 507.2 | 368.6 | | | | | | | | |
| G33.0 | 470.2 | 324.9 | | | | | | | | |
| G34.0 | 427.4 | 281.8 | | | | | | | | |
| G35.0 | 379.3 | 240.7 | | | | | | | | |
| G36.0 | 330.2 | 201.7 | | | | | | | | |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

| G\C | C0.0 | C180.0 | | | | | | | | |
|-------|-------|--------|--|--|--|--|--|--|--|--|
| G37.0 | 278.9 | 167.0 | | | | | | | | |
| G38.0 | 227.9 | 139.7 | | | | | | | | |
| G39.0 | 182.8 | 117.5 | | | | | | | | |
| G40.0 | 147.1 | 99.6 | | | | | | | | |
| G41.0 | 118.7 | 84.6 | | | | | | | | |
| G42.0 | 94.8 | 72.2 | | | | | | | | |
| G43.0 | 75.1 | 59.8 | | | | | | | | |
| G44.0 | 58.0 | 48.5 | | | | | | | | |
| G45.0 | 44.0 | 38.0 | | | | | | | | |
| G46.0 | 33.1 | 29.5 | | | | | | | | |
| G47.0 | 25.7 | 23.2 | | | | | | | | |
| G48.0 | 21.3 | 19.4 | | | | | | | | |
| G49.0 | 18.6 | 16.9 | | | | | | | | |
| G50.0 | 16.9 | 15.7 | | | | | | | | |
| G51.0 | 15.9 | 14.8 | | | | | | | | |
| G52.0 | 15.1 | 14.3 | | | | | | | | |
| G53.0 | 14.7 | 13.4 | | | | | | | | |
| G54.0 | 14.0 | 13.3 | | | | | | | | |
| G55.0 | 13.4 | 12.7 | | | | | | | | |
| G56.0 | 12.7 | 12.6 | | | | | | | | |
| G57.0 | 12.3 | 12.2 | | | | | | | | |
| G58.0 | 11.8 | 11.6 | | | | | | | | |
| G59.0 | 10.8 | 10.9 | | | | | | | | |
| G60.0 | 9.8 | 9.4 | | | | | | | | |
| G61.0 | 8.7 | 8.5 | | | | | | | | |
| G62.0 | 8.0 | 7.8 | | | | | | | | |
| G63.0 | 7.3 | 7.3 | | | | | | | | |
| G64.0 | 6.7 | 6.6 | | | | | | | | |
| G65.0 | 6.2 | 6.2 | | | | | | | | |
| G66.0 | 5.7 | 5.6 | | | | | | | | |
| G67.0 | 5.3 | 5.3 | | | | | | | | |
| G68.0 | 4.8 | 4.9 | | | | | | | | |
| G69.0 | 4.3 | 4.2 | | | | | | | | |
| G70.0 | 3.9 | 3.6 | | | | | | | | |
| G71.0 | 3.4 | 3.2 | | | | | | | | |
| G72.0 | 2.9 | 2.8 | | | | | | | | |
| G73.0 | 2.5 | 2.2 | | | | | | | | |

C Plane (°):0.0-180.0: 180.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector:

Unit: cd

[illegible]

Test Device: CHL-6E
Distance: 2.905 m
Humidity:
Inspector: